


ASSEMBLY INSTRUCTIONS



CAUTION! Make sure electricity is off before and during installation or maintenance. The luminaire must be installed by a qualified professional in accordance with all applicable local regulations.

This luminaire is designed for indoor or sheltered use. The location chosen for installation must support the weight of the product. If needed, secure the luminaire to structural elements such as beams and slabs. Installations in special locations require appropriate fixings.

Models Lamps
Set E-26

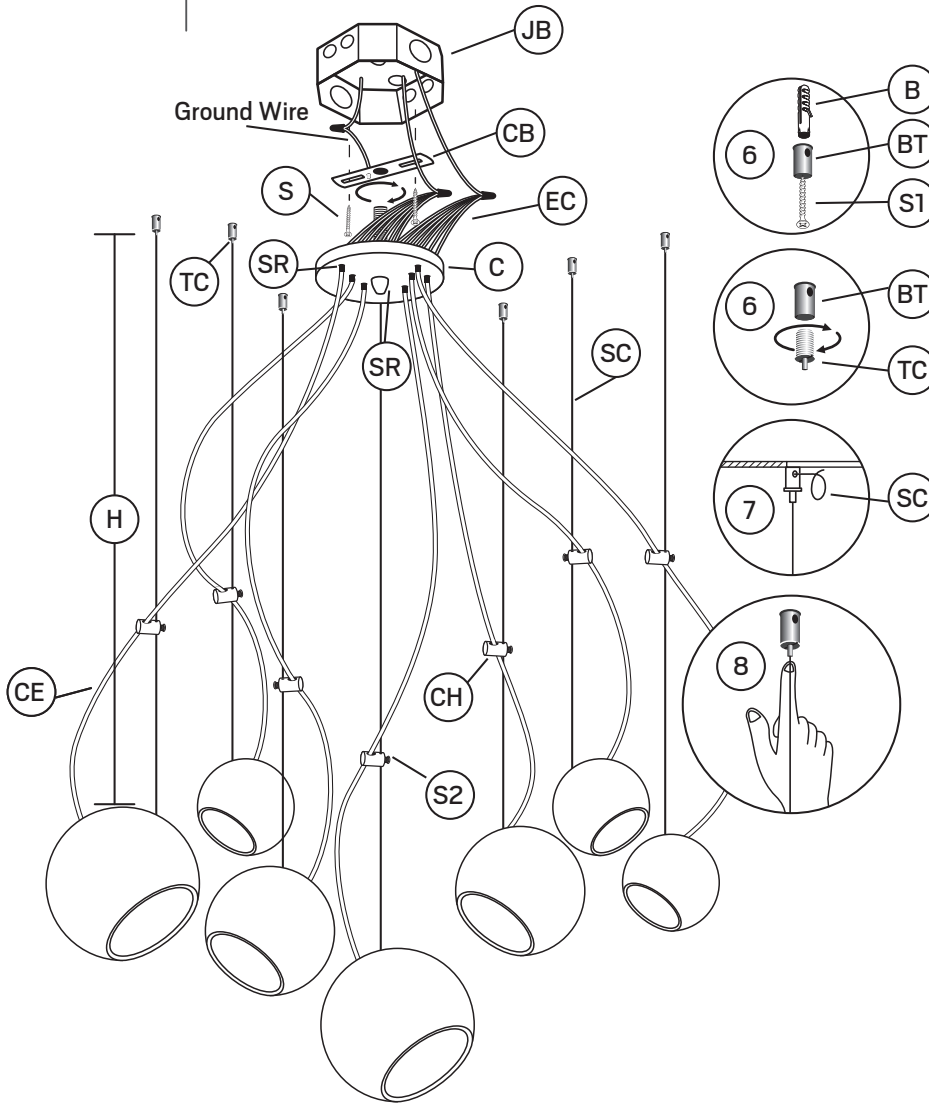

Description: installation manual for a set of pendants using a single canopy

Composition: ceramics

Instructions:

- 1) Remove the product from protective packaging, taking care not to damage any of the parts with sharp surfaces or objects.
Place the parts of the fixture on a horizontal surface to connect them. If needed, use the protection package to shield the surface and protect the parts from scratches or damage.
- 2) Turn off the electricity before beginning the installation process.
- 3) Remove the cover or old fixture from the junction box (JB).
- 4) Fix the crossbar (CB) of the luminaire in the junction box (JB) using the screws (S).
- 5) Determine and mark the positions of the pendants on the ceiling.
- 6) Use drills to insert the plastic bushing (not included) on the holes, and fix the suspension system ceiling (SC) with the rod using screws (S1) (not included).
- 7) Insert the steel cables (SC) in the cable holder (CH) and cables anchors (CA), and raise the pendants to the desired height. The steel cables (SC) should come out of the side of the suspension system ceiling (SC). The excess steel cables (SC) should be cut during final adjustments.
- 8) After attaching the pendants to the cable anchors (CA), adjust the pendant's height as shown in the illustration.
Adjusting the height:
Choose the desired height (H) for the piece.
The energy cable (EC) must be longer than the steel cable (SC) to curve as per the drawing. The pendant's curve will be determined by the positioning of the cable holder (CH).
Press the cable anchors (CA) to release the steel cable (SC), adjust the height, and release them to lock. You can make final adjustments after installing the piece.
- 9) Insert energy cable (EC), through cable holder (CH), strain relief (SR), and canopy (C).
- 10) Adjust the length of the energy cable (EC). Fix the cable holder (CH) using the screw (S2) as shown in the illustration.
- 11) Connect the energy cables (EC) in accordance with applicable local codes.
- 12) After finishing the electrical connection, insert the excess energy cables (EC) into the junction box (JB).
- 13) Raise the canopy (C) to the ceiling and fix it by screwing the strain relief (SR) to the crossbar (CB) until the canopy (C) is tight against the ceiling.
- 14) Once the luminaire is suspended and leveled, if necessary, adjust the cable holder (CH), install the bulb lamp (not supplied), turn on the electrical power and your luminaire is ready to be used.



ATTENTION! Failure to comply with the instructions in this manual may cause accidents and void the product warranty. It is recommended that you read these instructions completely and carefully before proceeding. Make sure that the rated voltage requirements of the luminaire are compatible with the electric supply. Improper installation may cause property damage, fire, personal injury, or death. This Installation Manual is intended only for qualified electricians with proven knowledge about electrical installations and should be used as a manual for installing luminaires. All manufacturer's instructions accompanying the product must be followed. We stress the need for knowledge about electrical installation; hire an electrician.

Save these instructions for future reference.

Geo Contemporary warrants coverage against manufacturing defects, including electrical components and finishes, for a period of 3 years under normal conditions of use from the date of purchase. For warranty service contact your local dealer for more information. Proof of purchase date will be required for warranty validation.

The Manufacturer's responsibility regarding the product warranty is related to the correct observation of the instructions contained in this Manual. The Manufacturer is not responsible for any damages to the product caused by accidents, alterations of any nature, misuse, or improper installation. See our website for more details on warranty conditions.