Manufacturer
Ribas D'Avila Comercial Ltda.
CNPJ: 00.333.748/0001-06

Website
www.geoceramica.com.br


Contact / Phone
geo@geoceramica.com.br
19 3032.1053

INSTALLATION INSTRUCTIONS

CAUTION: Ensure power is off before and during installation or maintenance. The luminaire must be installed by a qualified electrician in accordance with all applicable local electrical codes.

Suitable for damp locations
The installation site must support the product weight. If needed, secure the luminaire to structural members such as beams or slabs. Special locations require appropriate mounting.

Model	Lamps
Sig	GU10 LED lamps only

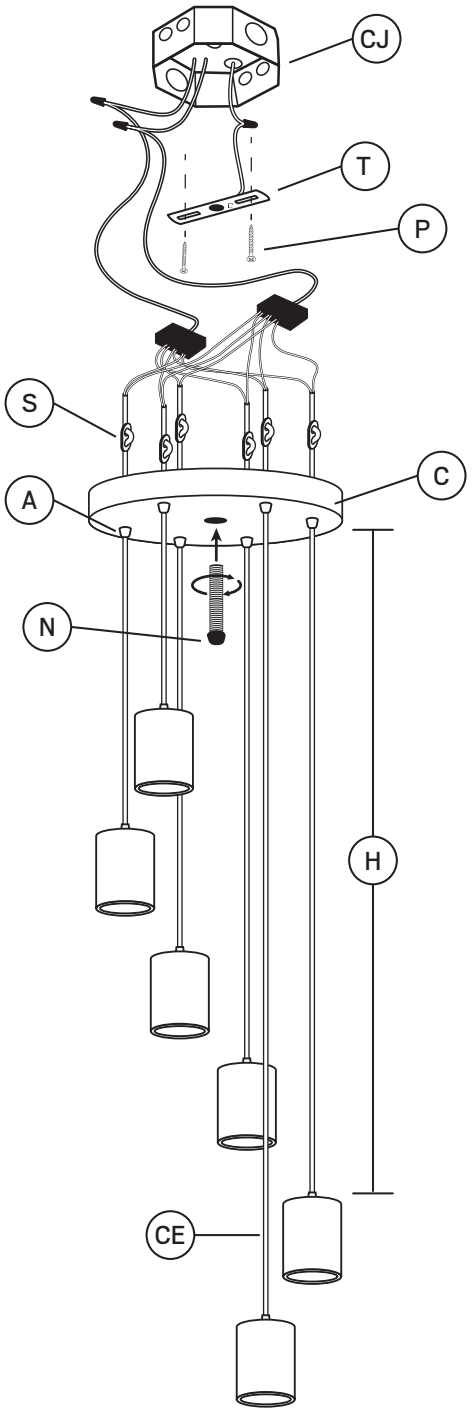

Description: Sig ceiling pendant set

Material: ceramic and aluminum

Instructions:

1) Remove the protective packaging. Take care not to damage any parts with sharp surfaces or objects.

   Place the luminaire parts on a horizontal surface to connect them. If needed, use the protective packaging to cushion the surface and protect the parts from scratches or damage.
2) Turn off power before starting installation.
3) Remove the cover or existing luminaire from the junction box (CJ).
4) Secure the mounting crossbar (T) to the junction box (CJ) using screws (P) (not included).
5) Feed the power cords (CE) through the trim fittings (A) on the canopy (C) and through the cord grips (S).
6) Set the height (H) of the pendant power cords (CE) using the cord grips (S).
7) Connect the power cords (CE) in accordance with all applicable local electrical codes.
8) After making the electrical connections, tuck the excess power cords (CE) into the junction box (CJ).
9) Thread the nipple (N) onto the crossbar (T) until the canopy (C) is tight against the ceiling.
10) Install lamps (not supplied) in the pendant sockets. Turn on the electrical power. Your luminaire is now ready for use.

WARNING: Failure to comply with the instructions contained in this manual may cause accidents and void the product warranty. It is recommended that you read these instructions completely and carefully before proceeding. Ensure that the luminaire's rated voltage requirements are compatible with the electrical supply. Improper installation may cause property damage, fire, bodily injury, or death. This installation manual is intended only for qualified electricians who have knowledge of electrical installations, and should be used as a manual for the installation of luminaires. All manufacturer instructions that accompany the product must be followed. We emphasize the need to have knowledge of electrical installation; hire a qualified electrician.

Keep these instructions for future reference.

Geo Luz&Cerâmica provides coverage against manufacturing defects, including electrical components and finishes, for a period of 1 year under normal conditions of use, beginning on the date of purchase. For warranty service, please contact your local dealer for more information. Proof of the date of purchase will be required to validate the warranty.

The manufacturer's responsibility for the product warranty is subject to proper compliance with the instructions contained in this manual. The manufacturer is not liable for any product damage caused by accidents, modifications of any kind, misuse or improper installation. Please visit the website for more details on the warranty terms and conditions.

Geo Luz&Cerâmica reserves the right to change the dimensions and specifications in this manual without notice as part of its policy of continuous product improvement.
The illustrations in this manual are for guidance only and may vary in scale, dimensions and model details. Please contact the manufacturer for additional information.